



RFB for Pass-a-Grille Way North Washingtonia Palm Trees

November 22, 2016

Addendum 1: Questions Answered

This Addendum presents clarifications to the RFB and answers to questions presented:

- The Washingtonia Palms to be included in this bid are to have 20 feet of clear trunk at the time of installation.
- Section 580-6 of the Project Specifications states:

“When called for in the Contract Documents, install root barriers or fabrics in accordance with the details shown.”

The City does not anticipate the need for root barriers for the trees to be planted as part of this RFB. Should root barriers be found to be necessary during tree planting, the type of barrier and associated cost of installation will be negotiated between the City and the awarded Contractor.

The lone detail included with the Project Plans which was inadvertently excluded from this bid package is attached to the following page of this addendum.

- Under the heading of **BEGINNING DATE** on page 7 of the RFB it states:


“The Contractor shall assume responsibility for the bypass pumping system immediately upon contract execution, which is anticipated to occur upon approval at the City Commission meeting scheduled for December 12th, 2016.”

This excerpt was part of a previous version which was used as the template for this RFB and was incorrectly included in this document. There is no bypass pumping associated with the planting of the trees. It is, however, correct that *“contract execution...is anticipated to occur upon approval at the City Commission meeting scheduled for December 12th, 2016”*, which shall be the beginning date for this contract. Upon contract execution, the City may elect to immediately move forward with the planting of the first 35 trees at the north end of the project (alternate bid item 1). The remaining trees (or all 292 trees should the City elect not to execute alternate bid item 1) will likely be planted under a single mobilization to occur upon completion of the roadway reconstruction, which the City anticipates to be in the late spring/early summer of 2017.

- All supplemental landscaping activities associated with this project beyond the planting and establishment of the Washingtonia Palm Trees, including but not limited to irrigation beyond the establishment period and sod placement, are the responsibility of David Nelson Construction and not required as part of this RFB.


NOTES:

1. NO TREE SHALL BE REMOVED UNLESS SPECIFICALLY TAGGED FOR REMOVAL BY THE ENGINEER.
2. THE CONTRACTOR SHALL TAKE SPECIAL CARE NOT TO DAMAGE TREES THAT ARE TO REMAIN.
3. ROOTS GREATER THAN 1" DIAMETER SHALL NOT BE CUT UNLESS OTHERWISE APPROVED BY THE ENGINEER.
4. ALL ROOT PRUNING SHALL BE PERFORMED BY AN ISA CERTIFIED ARBORIST IN ACCORDANCE WITH ANSI-A300 STANDARDS.
5. STOCKPILED MATERIALS OR UNNECESSARY VEHICULAR TRAFFIC SHALL NOT BE ALLOWED OVER ANY TREE ROOTS SYSTEM.
6. BARRIER SHALL BE CONSTRUCTED WHEN CALLED FOR ON PLANS OR AS DIRECTED BY THE ENGINEER. BARRIERS SHALL BE MAINTAINED IN PLACE UNTIL REMOVAL IS DIRECTED BY THE ENGINEER.
7. COST OF ALL TREE BARRICADES SHALL BE INCLUDED IN PAY ITEM 120-1100 (GRADING).
8. SUBSTITUTION FOR WOODEN (1" X 2" MIN.) BEAMS WITH OTHER MATERIALS REQUIRE PRE-APPROVAL BY THE COUNTY ENGINEER.

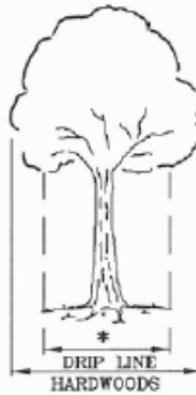

REQUIRED DISTANCES FROM TREE TRUNK

- * 2/3 THE DRIP LINE OR 6 FEET, WHICHEVER IS GREATER.
- ** DRIP LINE FOR PINES/CONIFERS AND CABBAGE PALMS FOR 6 FEET, WHICHEVER IS GREATER.

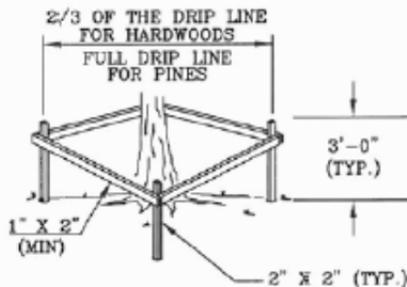

BARRIER

PINELLAS COUNTY
DEPARTMENT OF ENVIRONMENT AND INFRASTRUCTURE
(D.E.I.)
TREE PROTECTION

DETAIL INDEX I. D. :	1111
DATE:	SEPTEMBER/2012
DIV. DIRECTOR OF ENV. & TECH. SUPPORT	
REVISION:	<i>[Signature]</i>