

# NOTICE TO POOL CONTRACTOR

**BEFORE A PERMIT CAN BE ISSUED FOR CONSTRUCTION AND BEFORE DISCHARGE OF ANY GROUND WATER YOU MUST HAVE A PRE-SITE INSPECTION PASSED.**

**The Following is required to be in place at time of pre-site inspection:**

1. Property pins must be located and a string line must be put in place to show where the distance of the water edge will be from the property lines.
2. A silt fence must be in place and properly installed.
3. The pump hose **MUST** be in place and a filtration device attached to the end of it for sedimentation control. A dewatering filter bag or a pipe sock shown below are examples of acceptable methods of sedimentation control.



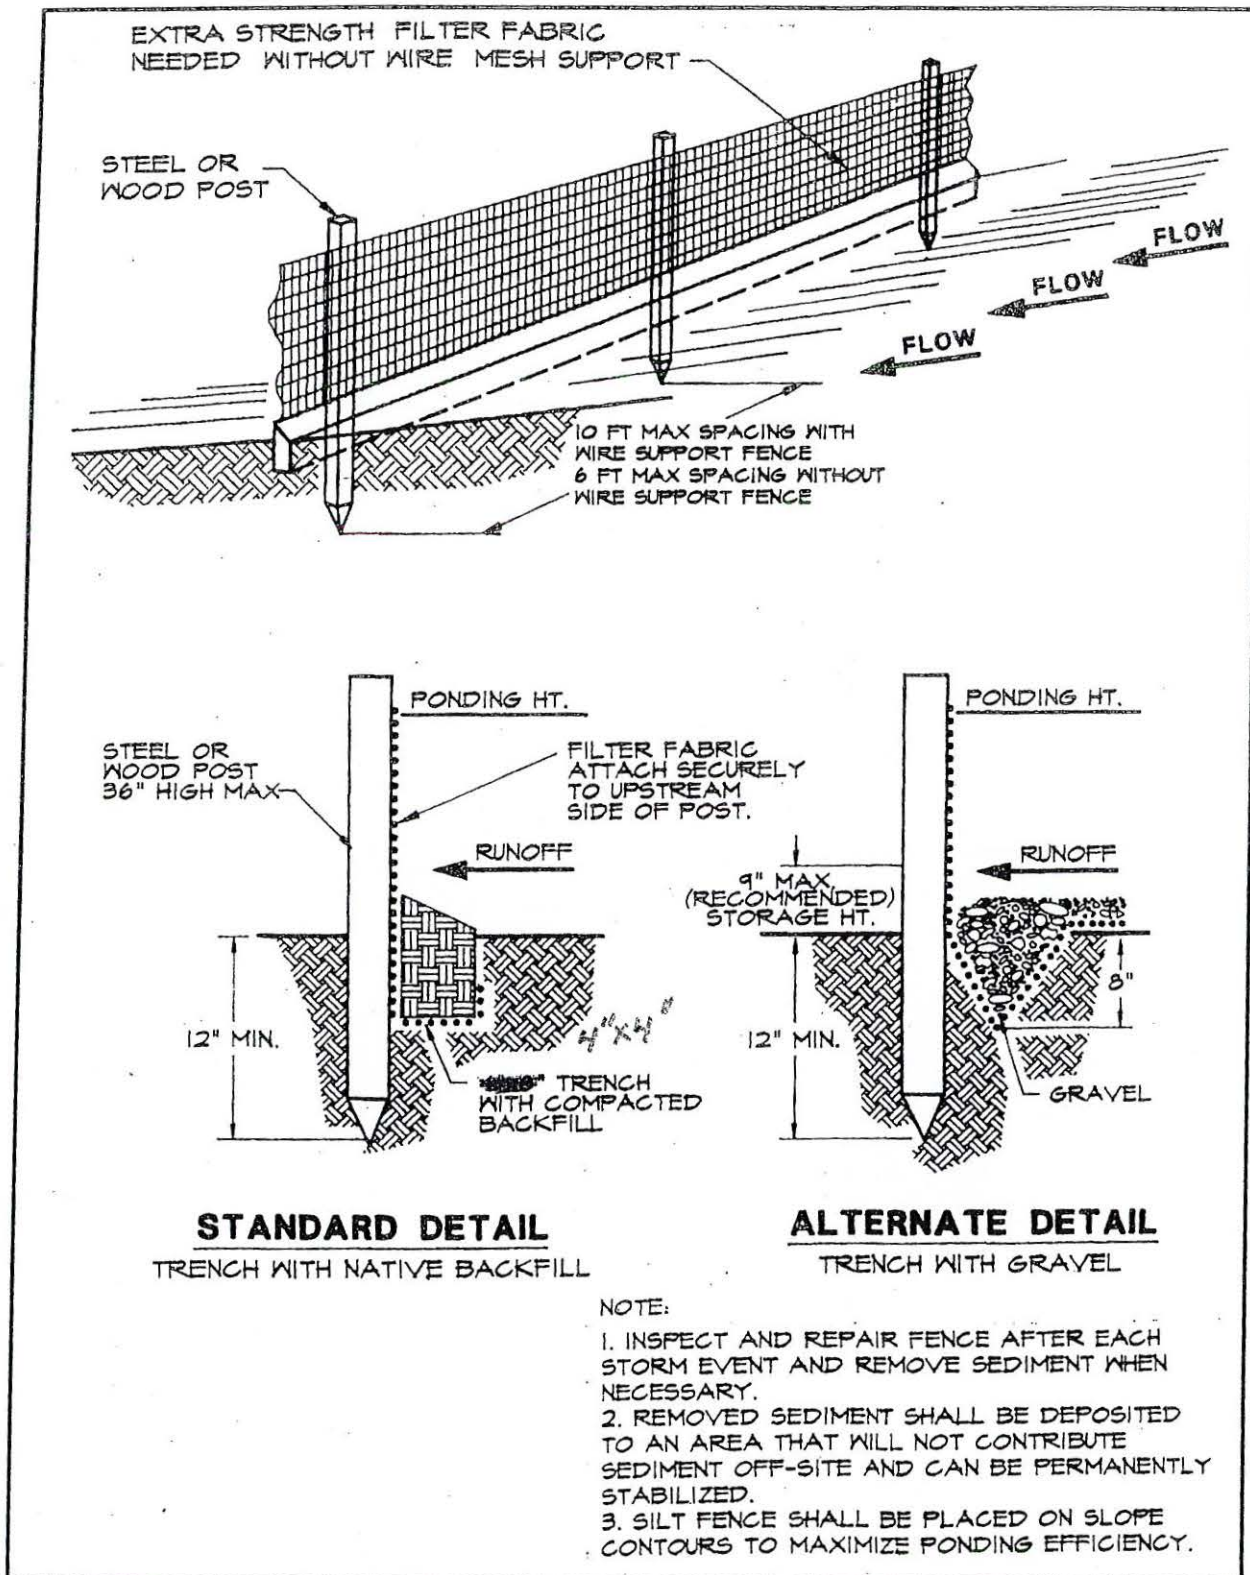


Figure 4.4a. Silt Fence

Source: Erosion Draw